


Lhotse LDLH-12 CSS

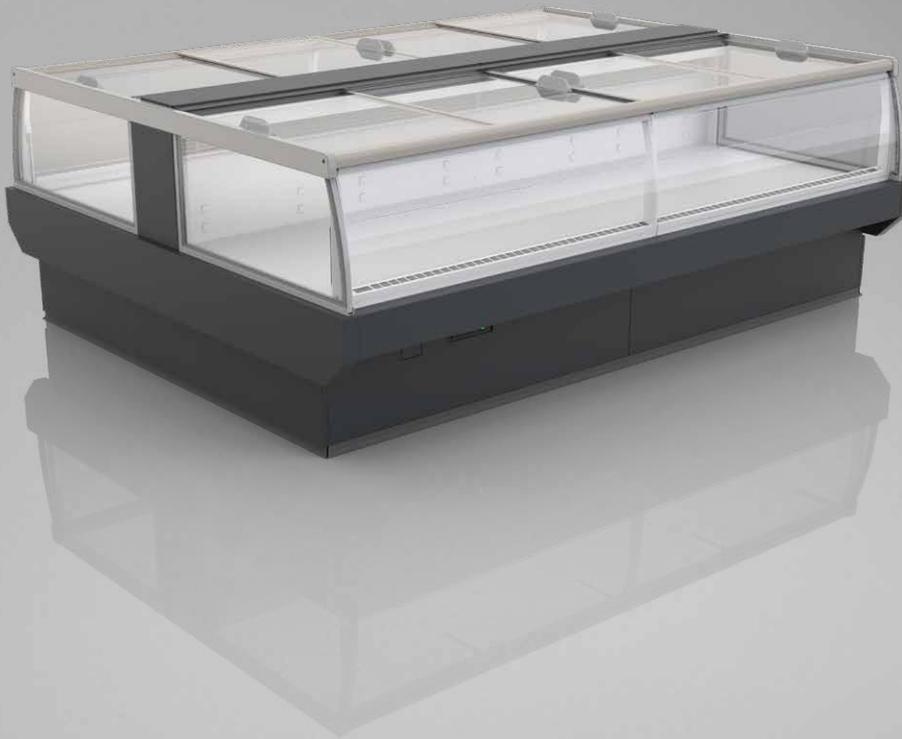

STANDARD FEATURES


- working temperature: from 0°C to 2°C
- refrigerant: R744
- electrical defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- worktop: linen stainless steel
- exposition on the full base

OPTIONS

- electronic expansion valve
- LEDit lighting
- PVC floor profiles
- bumper
- sidewalls

Lhotse LDLH-12 2500 CSS

CSS — cover | single, straight | sliding (sideways)

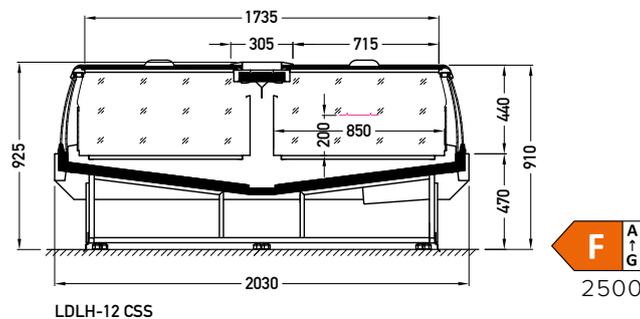

AVAILABLE MODULES

1875 2500 3750
1930G